

# AUTA 700305 (5 Wire)



## Terminals

- 10 Lock
- 12 Electronic Call
- 4 Common
- 3 Speech Out (Mic)
- 7 Speech In (Speaker)
- Aux 1
- Aux 2

### IMPORTANT NOTE :

1) Before replacing the handset make note of the wires to each terminal on the existing unit (an easy way is to cut each core off leaving a piece of the insulation in place with colour visible) twist unused cores together (so you know they are not used, do not short them out).

2) Some older systems will have cable with one coloured core and a solid white core in this case mark each core with a marker or tape.

3) Some systems may have loop on wiring, you will have 2 cables into your handset (make sure any joins remain, as these may be serving other flats on the system).



# ANALOGICAL COMPACT PHONE

## ELECTRONIC REF: 700305

### ELECTRONIC CALL INSTALLATION

WIRING SECTIONS	UP TO 100 m.	UP TO 200 m.
+, 3, 7, 10, 12	0.5 mm <sup>2</sup>	1 mm <sup>2</sup>
, 12Vac	1 mm <sup>2</sup>	

www.intercomsrus.com

COMMON WIRES

TF COMPACT ANALOGICO ELECTRONICO



10 4 3 12 7 AUX

LL/n LL/1

CONNECT TO THE TERMINAL FREE OF THE CORRESPONDING PUSH-BUTTON.


www.intercomsrus.com

PULSADOR AUXILIAR ABREPUERTAS AUXILIARY PUSH-BUTTON



If the telephones get audio feedback when hanging up, open de audio module cover and adjust POT 3 properly.

DOOR OPENER 12Vac - 0.8A

230Vac



Cp<sub>E</sub>: ELECTRONIC CALL

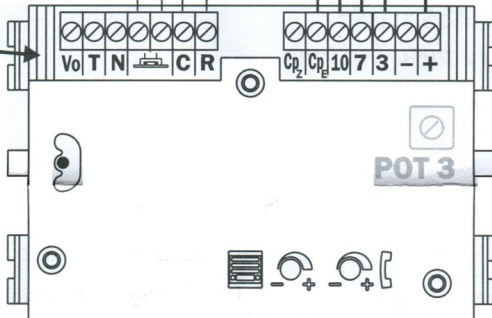


LL/n

LL/1

www.intercomsrus.com

- 1° Lift the handset up
- 2° Unscrew
- 3° Remove cover
- 4° Connect the wires
- 5° Place the cover, the screw and the handset

www.intercomsrus.com

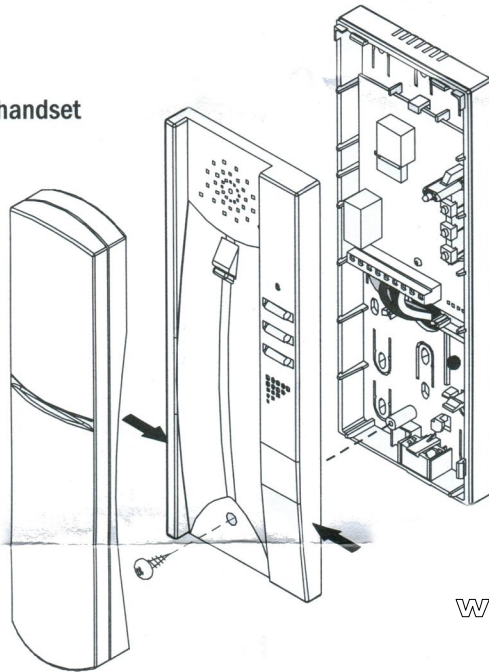


www.intercomsrus.com

**Characteristics:**

- Surface installation or with universal box 60X60
- Injected in ABS plastic
- -Two auxiliary push-buttons

- **Supplying:**  
9 Vcc / 0.2A *Electronic call*

**Description**

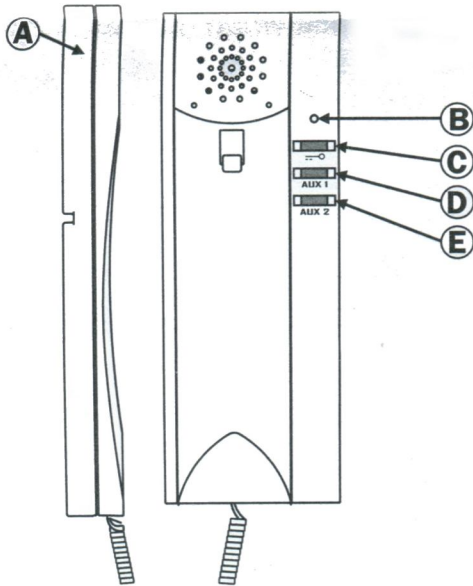

- A** Phone handset
- B** Light indicator Green led - Electronic Call
- C** Door opener
- D** AUX 1 (+)
- E** AUX 2 (+)

www.intercomsrus.com

www.intercomsrus.com