

# Elvox 8875 (Electronic Call)



## Terminals

- B
- 1 Speech In (Speaker)
  - 2 Speech Out (Mic)
  - 3 Common ([link to 4/5](#))
  - 6 Call
  - 7 Lock

### IMPORTANT NOTE :


1) Before replacing the handset make note of the wires to each terminal on the existing unit (an easy way is to cut each core off leaving a piece of the insulation in place with colour visible) twist unused cores together (so you know they are not used, do not short them out).

2) Some older systems will have cable with one coloured core and a solid white core in this case mark each core with a marker or tape.

3) Some systems may have loop on wiring, you will have 2 cables into your handset (make sure any joins remain, as these may be serving other flats on the system).

# WIRING DIAGRAM

## 1 Way Audio With 931 Power Supply


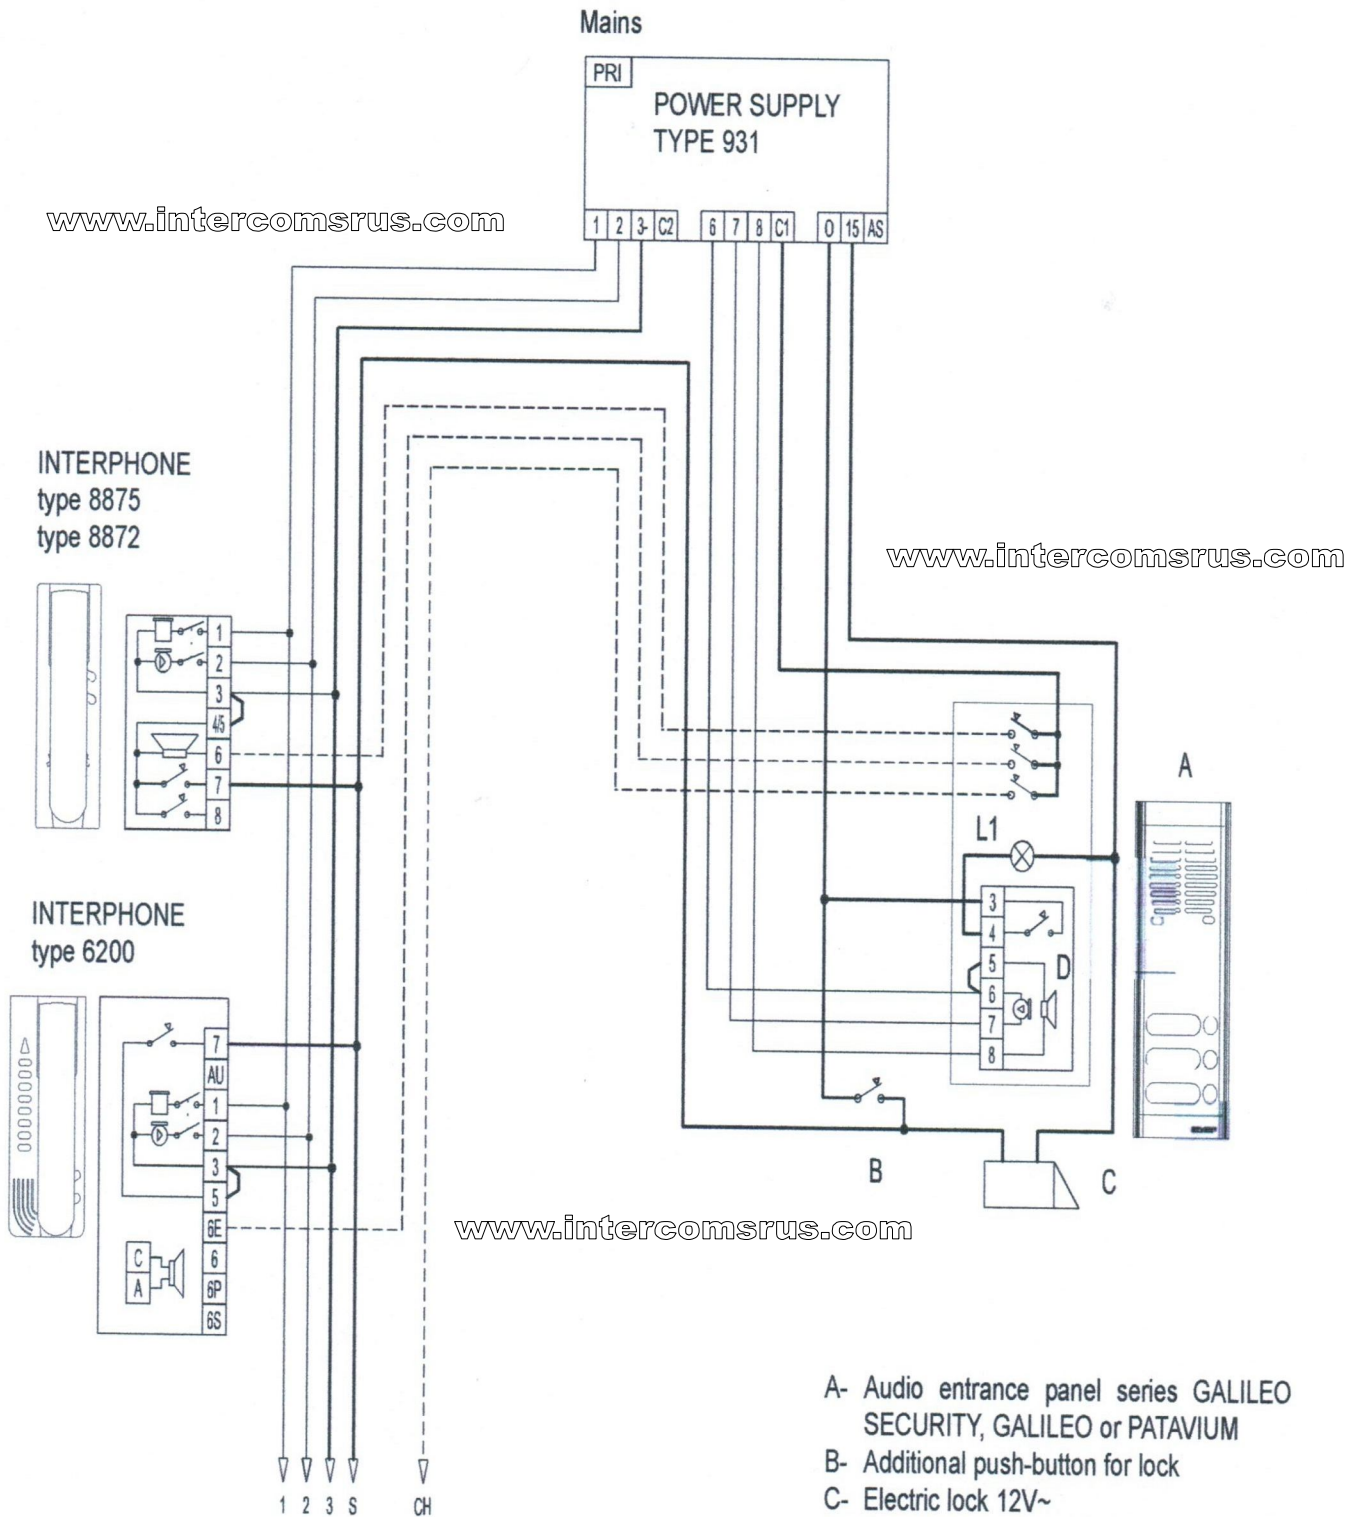


# 1 Way Audio With 936 Power Supply



www.intercomsrus.com

Mains


INTERPHONE  
type 8875  
type 8872




INTERPHONE  
type 6200



CH 3 2 1 S




www.intercomsrus.com

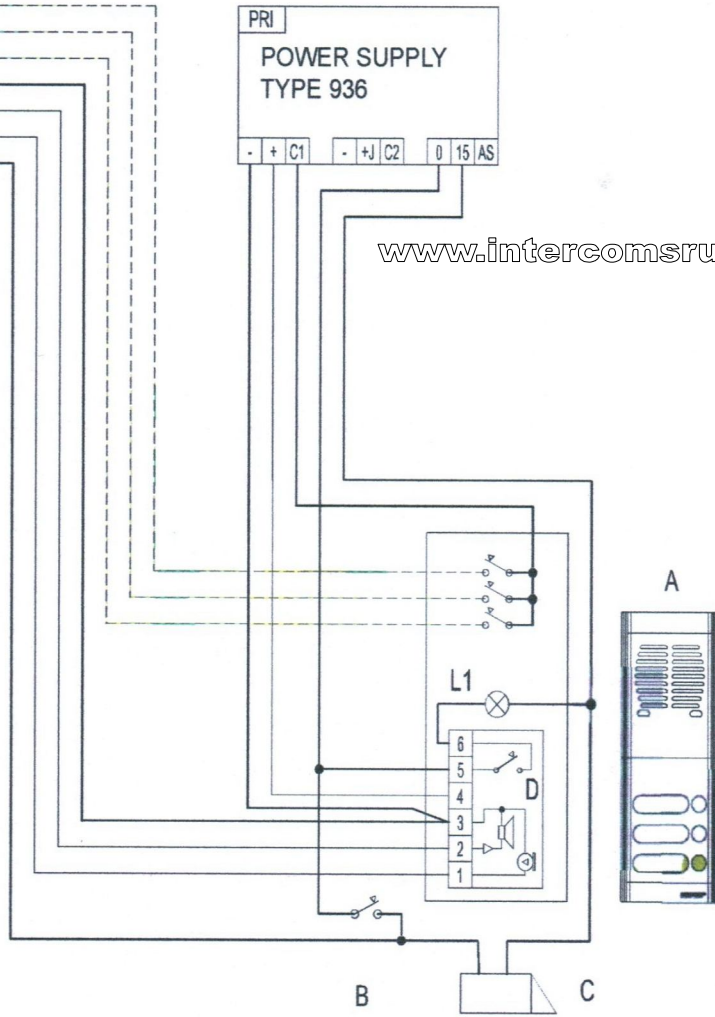

www.intercomsrus.com


- A- Entrance panel series GALILEO, GALILEO SECURITY or PATAVIUM
- B- Additional push-button for lock
- C- Electric lock 12V~
- D- Speech unit type 930/836 - 930F
- L1- Panel bulb  
(3x24V 3W max.)  
10x24V 3W with type M832  
16x24V 3W with type 832/030

## 2 Entrance System With 931 Power Supply

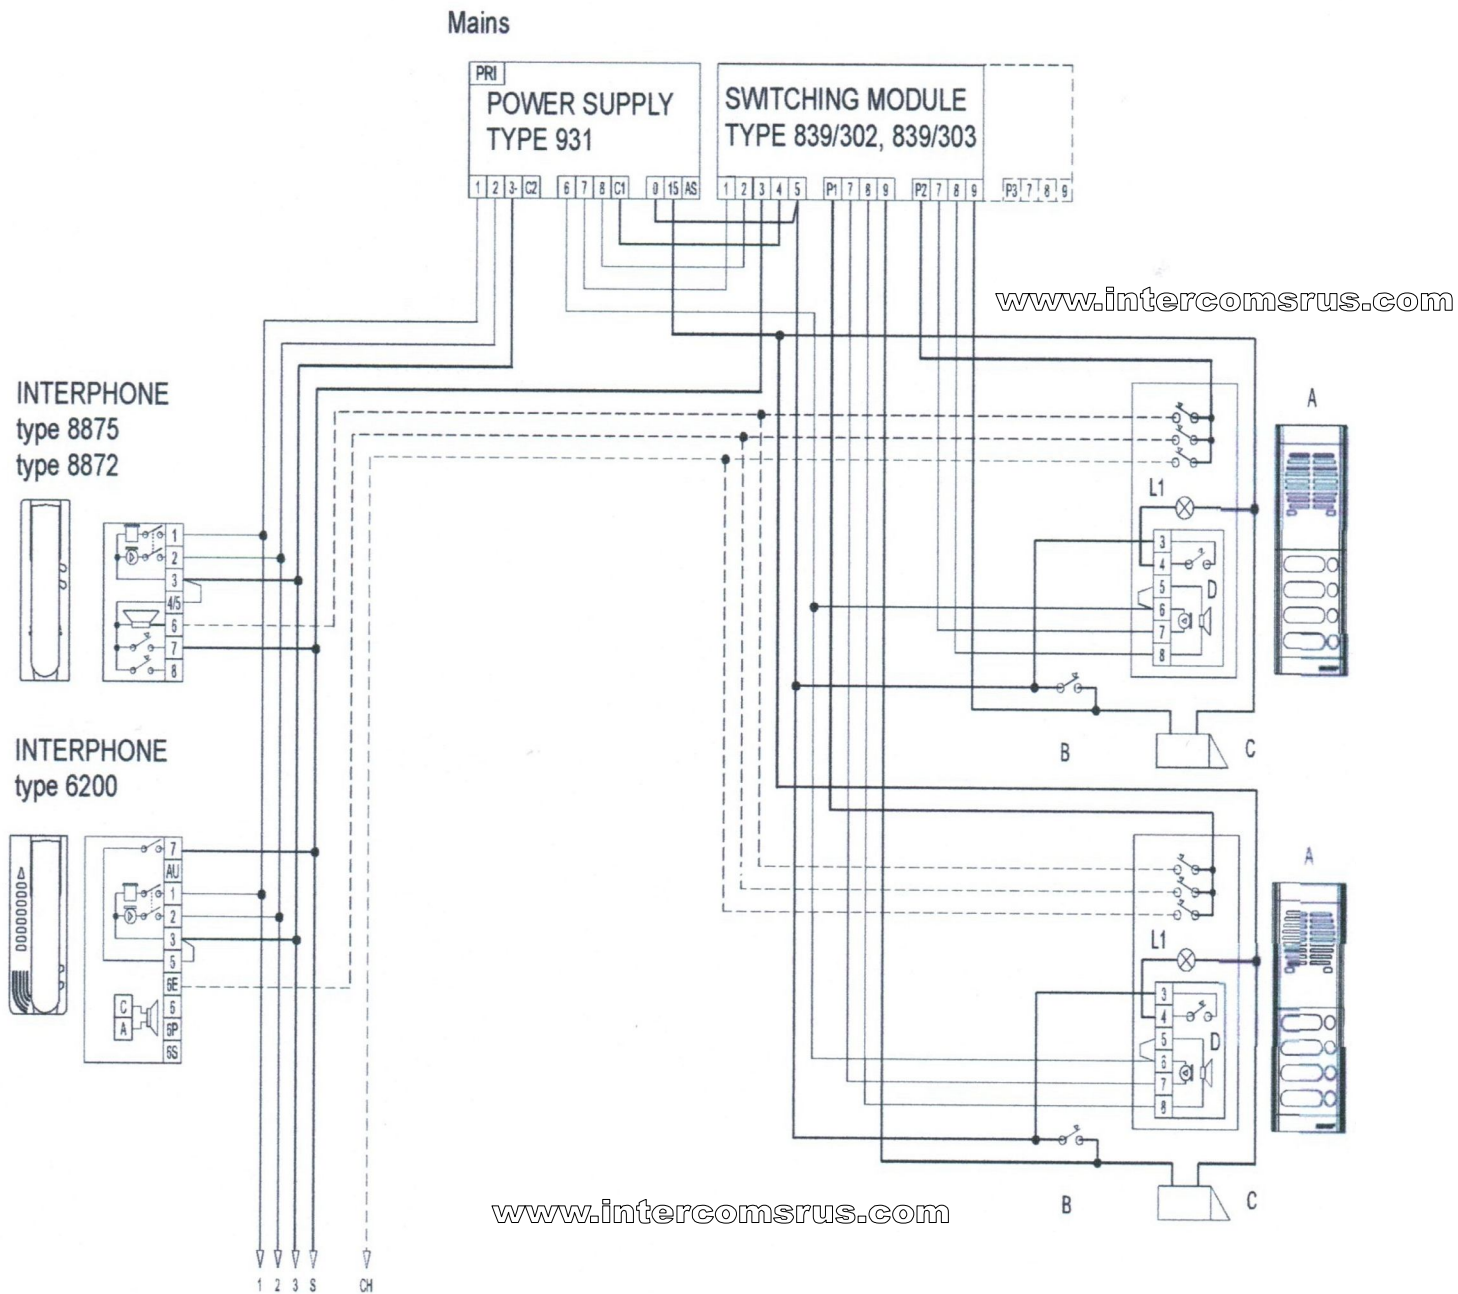

- A- Entrance panel series GALILEO SECURITY, GALILEO or PATAVIUM
- B- Additional push-button for lock
- C- Electric lock 12V~
- D- Speech unit type 930 or 930A
- L1- Panel bulb  
(3x24V 3W max.)  
10x24V 3W with type M832  
16x24V 3W with type 832/030

## 2 Entrance System With 936 Power Supply

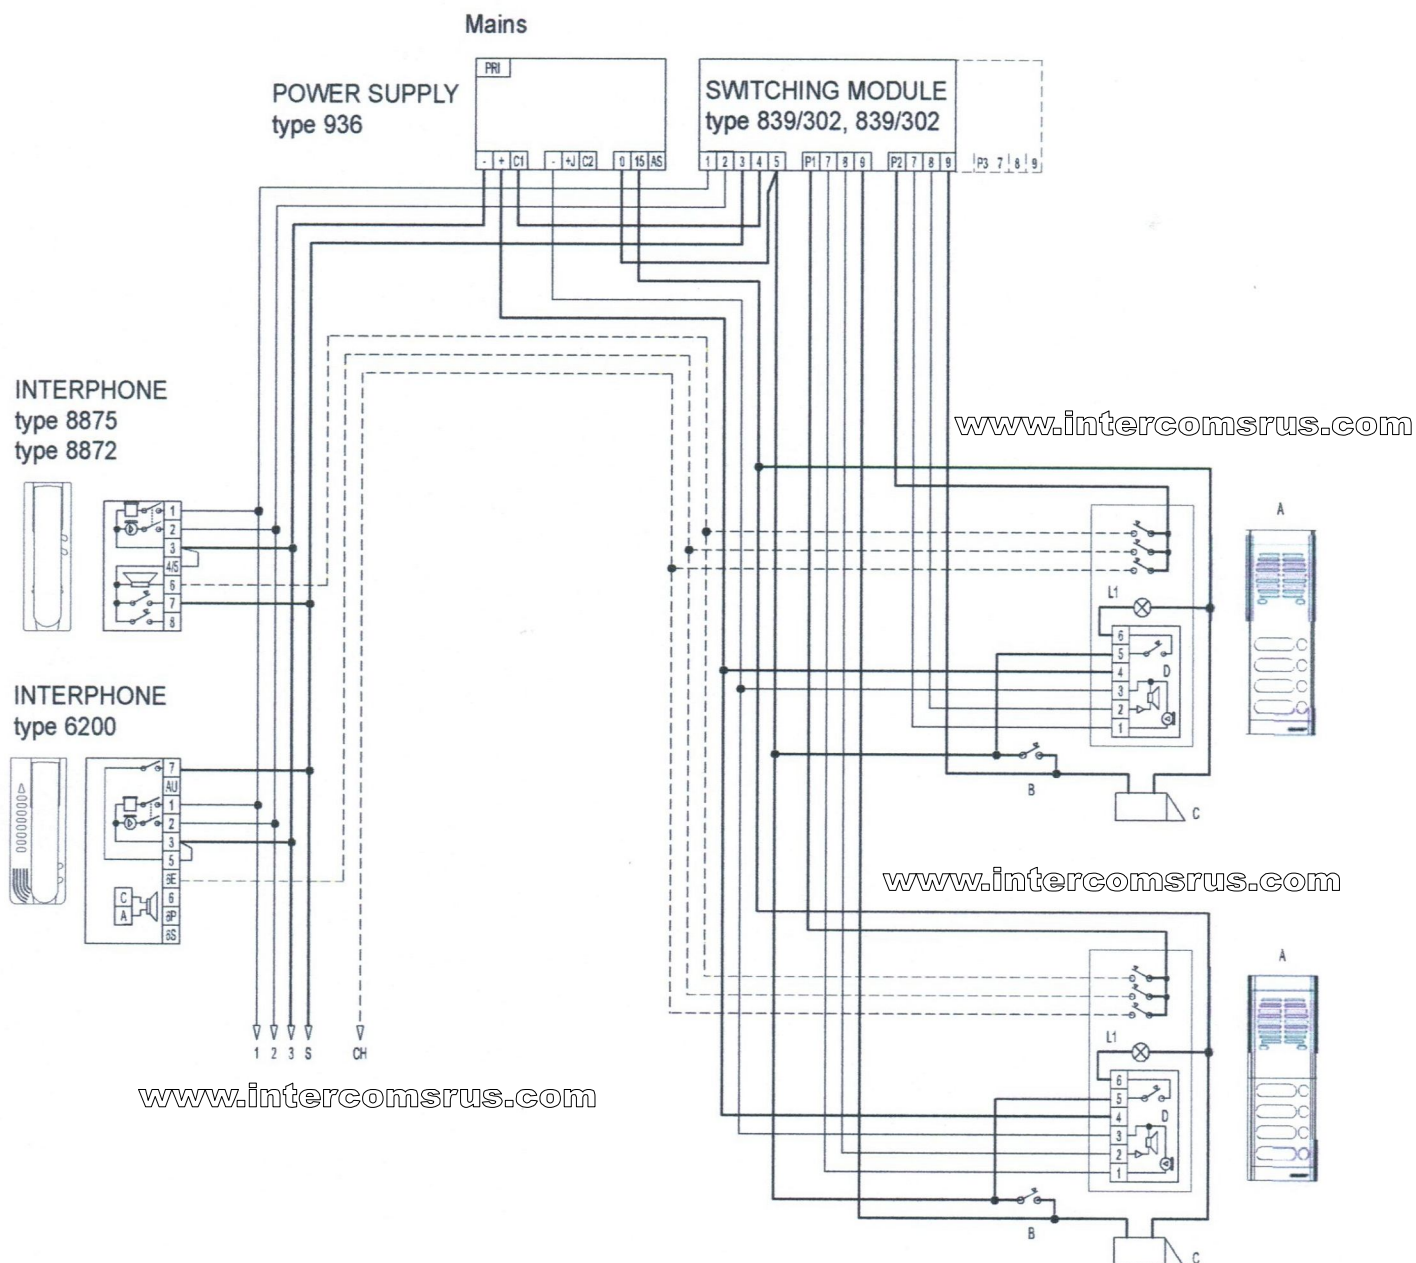

- A- Entrance panel series GALILEO SECURITY GALILEO or PATAVIUM
- B- Additional push-button for lock
- C- Electric lock 12V~
- D- Speech unit type Type 930/836, 930F
- L1- Panel bulb (3x24V 3W max.)  
10x24V 3W with type M832  
16x24V 3W with type 832/030

## VARIANTS OF HANDSET

- 8870 - To be used on audio or video door entry systems with A.C. call, power supplies type 831, 836, 6580 (6680) and 4 + 1 conductor wiring.

- 8871 - To be used on audio or video door entry systems with A.C. call, power supplies type 831, 836, 6580 (6680) and 4+ 1 conductor wiring. Equipped with conversation switch on the handset.
- 8875 - To be used on audio or video door entry systems with Sound System call, power supplies type 931, 931/OCT, 936, 6680 and 4 + 1 conductor wiring.
- 8872 - To be used on audio or video door entry systems with Sound System call, power supplies type 931, 931/OCT, 936, 6680 and 4 + 1 conductor wiring. Equipped with conversation switch on the handset.
- 8878 - To be used on audio or video door entry systems with Sound System call, with conversation privacy and power supplies type 931 or 931/OCT.
- 8877 - To be used on "1+n wire" audio door entry systems with Sound System call and power supply type 6837 or on electronic Digi Bus door entry system with digital distributor.

8873 - To be used on "1+n wire" audio door entry systems with Sound System call, power supply type 6837 and conversation privacy.